

**Preliminary**  
**LL-30ABC2E-033**  
**DATA SHEET**



QC: 王士光

ENG: 鄭文斌


Prepared By: 楊銀花

Part No.	LL-30ABC2E-033	Spec No.	S/N-06123018	Page	1 of 4
----------	----------------	----------	--------------	------	--------

### Features:

- ◆ High intensity
- ◆ 3mm diameter package
- ◆ General purpose leads
- ◆ Pb-free

### Package Dimensions:

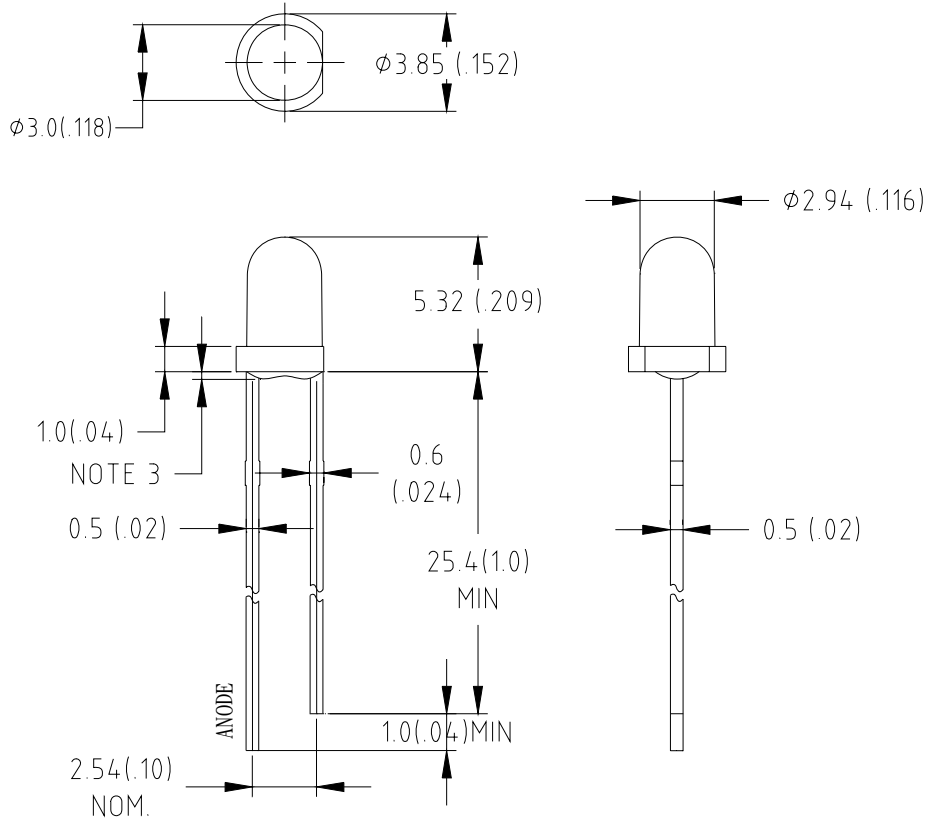

Part NO.	Chip Material	Lens Color	Emission Color
LL-30ABC2E-033	InGaN/SiC	Water Clear	Super Bright Blue

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is  $1.0\text{mm}$  (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD:

Static electricity and surge can damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.



**Absolute Maximum Ratings at Ta=25°C**

Parameter	MAX.	Unit
Power Dissipation	120	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	30	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	1000	V
Operating Temperature Range	-30°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Lead Soldering Temperature [4mm(.157") From Body]	280°C for 5 Seconds	

**Electrical Optical Characteristics at Ta=25°C**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_V$	690	1500		mcd	$I_F=20\text{mA}$ (Note 1)
Viewing Angle	$2\theta_{1/2}$		20		Deg	(Note 2)
Peak Emission Wavelength	$\lambda_p$	465	470	475	nm	$I_F=20\text{mA}$
Dominant Wavelength	$\lambda_d$	470	478	486	nm	$I_F=20\text{mA}$ (Note 3)
Spectral Line Half-Width	$\Delta\lambda$	25	30	35	nm	$I_F=20\text{mA}$
Forward Voltage	$V_F$	2.8	3.3	4.0	V	$I_F=20\text{mA}$
Reverse Current	$I_R$			10	$\mu\text{A}$	$V_R=5\text{V}$


**Notes:**

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- Forward voltage measurement allowance is  $\pm 0.1\text{V}$
- Luminous Intensity Measurement Allowance is  $\pm 10\%$ .




**Typical Electrical / Optical Characteristics Curves**  
 (25°C Ambient Temperature Unless Otherwise Noted)


**Spectral Radiance (Peak @ 470 nm)**

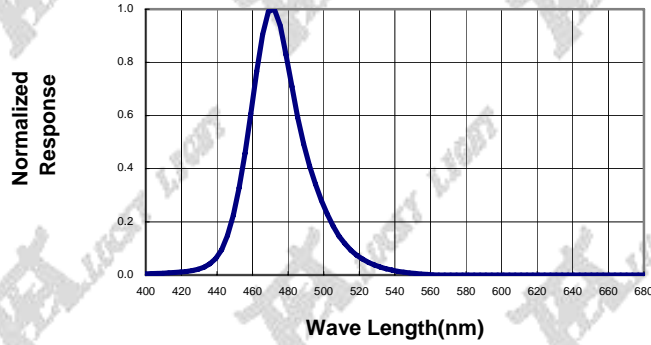


**Forward Current vs Forward Voltage**

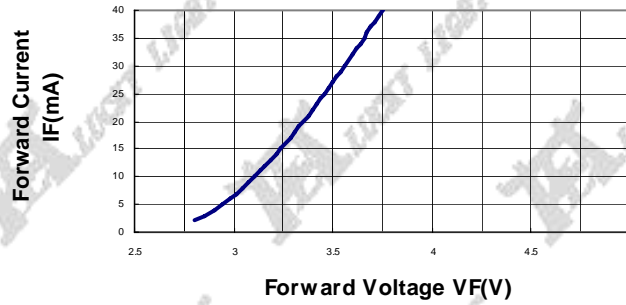

**Relative Luminous Intensity vs Forward Current**

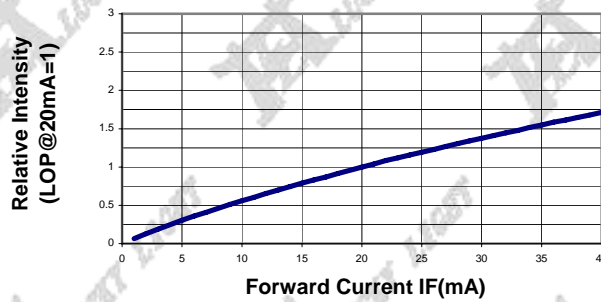

**Beam Pattern**

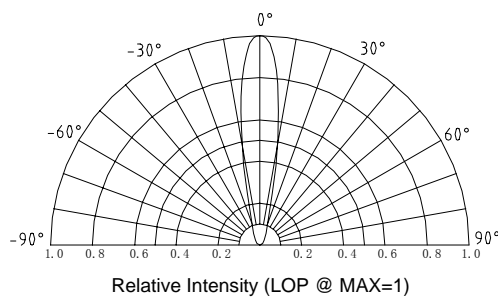

**Forward Current Derating Curve**

